

ACLD Screw Termination Boards

Features

General

- Low cost universal screw termination boards
- Blank pads accommodate applications such as break detection, low-pass filter, current shunt and voltage attenuator on ACLD-9881, ACLD-9178, ACLD-9188, ACLD-9138, and ACLD-8125
- Table-top mounting using nylon standoffs

ACLD-9881

General-Purpose Termination Board with One 37-pin D-sub Connector for PCI-9113A and ACL-8113A

- For use with PCI-9113A and ACL-8113
- On-board 37-pin D-sub female connector
- Reliable screw clamp termination blocks
- Shipped with one 1-meter ACL-10137 cable
- Dimensions: 222 mm x 105 mm

ACLD-9188

General-Purpose Termination Board with Two 20-pin Ribbon Connectors and One 37-pin D-sub Connector

- On-board 20-pin ribbon male connector x 2
- On-board 37-pin D-sub female connector
- Reliable screw clamp termination blocks
- Shipped with two 1-meter ACL-10120 cables
- Dimensions: 222 mm x 114 mm

ACLD-9178

General-Purpose Termination Board with Two 20-pin Ribbon Connectors

- On-board 20-pin ribbon male connector x 2
- Reliable screw clamp termination blocks
- Shipped with two 1-meter ACL-10120 Cables
- Dimensions: 103 mm x 114 mm

ACLD-9138

General-Purpose Termination Board with a 37-pin D-sub Connector

- On-board 37-pin D-sub female connector
- Blank RC circuits for analog input boards
- Reliable screw clamp termination blocks
- Shipped with one 1-meter ACL-10237 cable
- Dimensions: 103 mm x 114 mm

ACLD-9137 / ACLD-9137F

General-Purpose Termination Board with a 37-pin D-sub Connector

- ACLD-9137: on-board 37-pin D-sub male connector
- ACLD-9137F: on-board 37-pin D-sub female connector
- Reliable screw clamp termination blocks
- Dimensions: 124 mm x 72 mm

ACLD-8125


Termination Board with a 37-pin D-sub Connector and One Cold Junction Temperature Sensor

- One on-board temperature sensor for cold-junction compensation
- Jumper selectable sensor outputs in either DI or SE mode
- On-board calibration for the temperature sensor
- On-board 37-pin D-sub female connector
- Reliable screw clamp termination blocks
- Shipped with one 1-meter ACL-10137 cable
- Dimensions: 168 mm x 114 mm

ACLD-7285

Termination Board with Two 9-pin D-sub Connectors for ACL-6128A

- For ACL-6128A analog outputs
- On-board 9-pin D-sub female connector x 2
- Reliable screw clamp termination blocks
- Shipped with two 0.3-meter 9-pin D-sub ribbon cables
- Dimensions: 115 mm x 103 mm

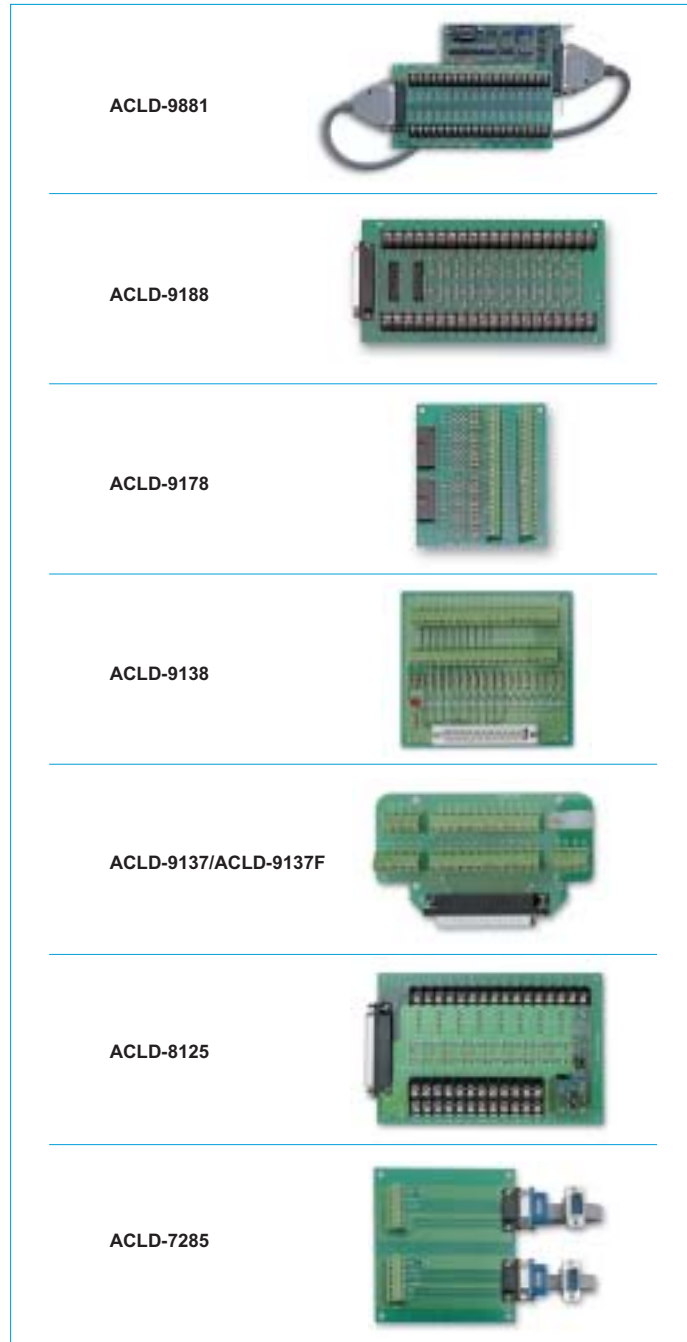

- 1 Software Solutions
- 2 PXI/ CompactPCI Platforms
- 3 PXI-Based Instruments
- 4 PXI/ CompactPCI Modules
- 5 PCI DAQ Cards
- 6 PCI DIO Cards
- 7 PC/ 104-Plus Products
- 8 ISA DAS/ DIO Cards
- 9 Wiring Termination Boards
- 10 Motion Control Cards
- 11 Machine Vision Products
- 12 Remote I/O Modules

Ordering Information

- **ACLD-9881**
General-Purpose Termination Board with one 37-pin D-sub Connector (Including one 1-meter ACL-10137 Cable)
- **ACLD-9188**
General-Purpose Termination Board with Two 20-pin Ribbon Connectors and One 37-pin D-sub Connector (Including Two 1-meter ACL-10120 Cables)
- **ACLD-9178**
General-Purpose Termination Board with Two 20-pin Ribbon Connectors (Including Two 1-meter ACL-10120 Cables)
- **ACLD-9138**
General-Purpose Termination Board with a 37-pin D-sub Connector (Including One 1-meter ACL-10237 Cable)

- **ACLD-9137**
General-Purpose Termination Board with a 37-pin D-sub Male Connector
- **ACLD-9137F**
General-Purpose Termination Board with a 37-pin D-sub Female Connector
- **ACLD-8125**
Termination Board with a 37-pin D-sub Connector and One Cold Junction Temperature Sensor (Including One 1-meter ACL-10137 Cable)
- **ACLD-7285**
Termination Board with Two 9-pin D-sub Connectors (Including two 0.3-meter 9-pin D-sub Ribbon Cables)