

cPCI-8554 Series

12-CH 16-Bit Timer/Counter & Digital I/O Modules

Features

- 3U Eurocard form factor, CompactPCI compliant (PICMG 2.0 R3.0)
- On-board four 82C54 programmable timer/counter chips
- Up to 12-CH 16-bit timer/counter
- 1-CH 32-bit cascaded timer
- On-board 8 MHz clock source
- Four programmable clock sources for each timer/counter
- Programmable de-bounce filters for external clock & external interrupt inputs
- Multiple programmable interrupt sources
- 8-CH TTL digital inputs and 8-CH TTL digital outputs
- 12 V and 5 V power available on the connector
- On-board resettable fuses for power output protection
- Rear I/O available on the cPCI-8554R

Operating Systems


- Windows 98/NT/2000/XP/2003
- Linux
- DOS

Recommended Software

- VB/V/C++/BCB/Delphi
- DAQBench

Driver Support

- DAQ-LVIEW PnP for LabVIEW
- DAQBOY for Windows
- PCIS-DASK for Windows
- PCIS-DASK/X for Linux

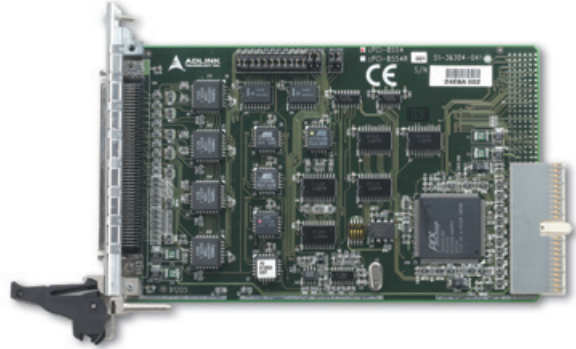

Introduction

ADLINK cPCI-8554 series are 12-CH 16-bit timer/counter and digital I/O modules for PXI/CompactPCI form factor. These devices provide ten independent timer/counters and one cascaded 32-bit timer by default, and is configurable to twelve independent timer/counters. The clock source for each timer/counter can be software selected from the cascaded 32-bit timer, external clock source, timer/counter output of the last channel, and the on-board 8 MHz clock. The flexible architecture makes it easy to reconfigure the hardware; for example, up to ten timer/counters can be cascaded to form a 160-bit timer/counter. The hardware can also generate interrupts from either the external interrupt sources or the output of the cascaded 32-bit timer.

The programmable de-bounce filters provide eleven channels of glitch-filtered external clock inputs for timer/counters and the external interrupt input; this feature further improves the reliability for counting applications. The cPCI-8554 series also provide 8-CH TTL digital and 8-CH TTL digital outputs.

ADLINK cPCI-8554 series deliver cost-effective and reliable solutions for event counting, frequency measurement, baud-rate generation, watchdog timer, and other industrial applications.

Specifications

General-Purpose Counters

- Number of channels: 12, maximum
- Number of cascaded counters: 10 maximum
- Counter Width: 16 bits
- Compatibility: 5 V/TTL
- Base clock available:
 - 8 MHz or external clock up to 10 MHz
- Programmable Clock Sources
 - Cascaded 32-bit timer
 - External clock source
 - Timer/counter output of the last channel
 - Onboard 8 MHz clock

Programmable De-bounce Filters for External Clocks

- Number of channels: 11
- Filtered inputs: External clock, external interrupt
- Glitch rejection pulse width:
 - 4 periods of the de-bounce clock
- De-bounce clock: up to 2 MHz, programmable

Interrupt

- Number of interrupt sources: 2
- Sources: Ext interrupt input and output of counter #12

Digital I/O

- Number of channels: 8 inputs and 8 outputs
- Compatibility: 5 V/TTL
- Data transfer: programmed I/O

General Specifications

- I/O connector: 100-pin SCSI-II female
- Operating temperature: 0 to 60°C
- Storage temperature: -20 to 80°C
- Relative humidity: 5 to 95 %, noncondensing
- Power requirements

Device	+5 V
cPCI-8554	350 mA typical
cPCI-8554R	350 mA typical

- Dimensions (not including connectors)
160 mm x 100 mm

Termination Boards

- **DIN-100S**
Termination Board with a 100-pin SCSI-II Connector and DIN-Rail Mounting (Including One 1-meter ACL-102100 Cable)
- **DIN-502S**
Two Pieces of DIN-50S Termination Board (Including One 1-meter ACL-10252 Cable)

Ordering Information

- **cPCI-8554**
12-CH 16-Bit Timer/Counter & Digital I/O Module
- **cPCI-8554R**
12-CH 16-Bit Timer/Counter & Digital I/O Module with Rear I/O

Note: Rear I/O version can not be used in PXI chassis due to signals conflict with PXI bus

Pin Assignment

+12Vout	1	51	GND
+12Vout	2	52	GOUT2
+12Vout	3	53	GIN2
+5Vout	4	54	GND
+5Vout	5	55	GOUT1
+5Vout	6	56	GIN1
GATE12	7	57	EXT. INT
DI6	8	58	DI7
DI4	9	59	DI5
DI2	10	60	DI3
DI0	11	61	DI1
DO6	12	62	DO7
DO4	13	63	DO5
DO2	14	64	DO3
DO0	15	65	DO1
GATE11	16	66	ECLK12
GND	17	67	COUT12
GND	18	68	ECLK11
GND	19	69	COUT11
GND	20	70	GND
GND	21	71	COUT10
GND	22	72	GATE10
GND	23	73	ECLK10
GND	24	74	COUT9
GND	25	75	GATE9
GND	26	76	ECLK9
GND	27	77	COUT8
GND	28	78	GATE8
GND	29	79	ECLK8
GND	30	80	COUT7
GND	31	81	GATE7
GND	32	82	ECLK7
GND	33	83	COUT6
GND	34	84	GATE6
GND	35	85	ECLK6
GND	36	86	COUT5
GND	37	87	GATE5
GND	38	88	ECLK5
GND	39	89	COUT4
GND	40	90	GATE4
GND	41	91	ECLK4
GND	42	92	COUT3
GND	43	93	GATE3
GND	44	94	ECLK3
GND	45	95	COUT2
GND	46	96	GATE2
GND	47	97	ECLK2
GND	48	98	COUT1
GND	49	99	GATE1
GND	50	100	ECLK1

1

Software
Solutions

2

PXI/
CompactPCI
Platforms

3

PXI-Based
Instruments

4

PXI/
CompactPCI
Modules

5

PCI DAQ
Cards

6

PCI DIO
Cards

7

PC/104-Plus
Products

8

ISA DAS/
DIO Cards

9

Wiring
Termination
Boards

10

Motion
Vision
& COM

11

Remote I/O
Modules

12

Industrial
Computers